



2500

Class leading features
RANGER



Class leading features
RANGER

2500



Leading in features

Being the smallest in the large HARDI trailer range, the kinship does not fail. The RANGER is designed to meet the request for a simple and reliable trailer. This goal is reached and proven by successful world-wide sales since the introduction in 2006.

At the same time RANGER is leading in its class offering a big range of different features.

Quality and design

Booms based on toughly different concepts ensure the right boom for the specific need.

Intelligent tank and frame design ensure stability and strength. Unique components guarantee best performance and ultimate durability.



SelfSteer

SelfSteer is coupled on the tractor's 3-point hitch and gives a better tracking on headland.

SelfSteer is a simple mechanical steering system with low maintenance and no operation or setting required by the operator during the spray job.

SelfSteer can be equipped with slope correction. Slope correction is manually operated directly from the tractor's hydraulics and helps the SelfSteer to stay in the tramline also in hilly conditions.

Manifold

The work zone is where all primary functions are placed in easy-to-reach positions. Everything needed to operate the sprayer is available in this area, and it is designed in a simple and logical way.

The manifold is prepared for options as RinseTank, cleaning nozzle and TurboFiller.

TurboFiller

TurboFiller is a high capacity induction hopper which makes the filling of chemicals fast and easy.

The unique TurboDeflector creates a powerful liquid circulation in the hopper and mixes all types of chemicals quickly and safely.

The mixing water is added through a unique distribution plate placed in the bottom of the TurboFiller. This secures a high capacity also when powders are used.

SPECIFICATIONS

- ▶ **Tank:** 2500 l designed for optimal stability and lowest residue
- ▶ **Frame:** High absolute clearance. Low centre of gravity
- ▶ **Diaphragm pump:** Reliable, high capacity and easy to service
- ▶ **Operating unit:** Electrically operated pressure regulation, on/off and sections
- ▶ **Controller:** HC 5500
- ▶ **Liquid system:** Intuitive and logical manifold system
- ▶ **Axle:** Adjustable from 1.5 to 2 m
- ▶ **PRO booms:** Compact, vertically folded booms from 12 to 21 m
- ▶ **EAGLE booms:** Simple and strong booms from 18 to 24 m

- ▶ Easy to operate
- ▶ Simple to service
- ▶ Short and compact
- ▶ Light weight

Vertically folded booms

Excellent performance

PRO VH from 12, 15, 16 and 18 m

PRO VP booms 20 and 21 m

The booms are constructed in steel with a lattice design optimizing weight with the greatest possible strength. The excellent performance of the PRO boom ensures precision spray applications even in the most challenging field conditions.

All functions on the PRO booms can be electro-hydraulically operated, from a compact, conveniently located control panel. The primary controls, those which are most used in the field, are grouped together for ease of use, such as boom height, independent tilting of either boom section and complete boom slanting.

Electro-hydraulic operation is option on VH and standard on VP.



AntiYaw

The whole range of PRO booms is equipped with an AntiYaw device.

The AntiYaw is incorporated into the boom on VP and on the boom centre on VH.

The anti yaw secures optimal spray application and minimizes stress on the sprayer.



Standard on PRO VH

- ParaLift for height control
- Symmetric fold of boom wings

Optional on VH / standard on VP

- Single-side folding
- Individual boom tilt
- Boom slant

Horizontally folded booms

Robust in tough field conditions

EAGLE SPB 18, 20, 21 and 24 m booms

EAGLE booms feature a rugged two-dimensional structure and a coil spring self-stabilizing trapeze boom suspension. This combination provides for many years of trouble free use even in the toughest field conditions.

A non-directional spring loaded break-away system protects the boom from damage. EAGLE boom is the solution if robustness and high driving speed are required.

Standard:

- ▶ ParaLift for height control
- ▶ Symmetric fold of boom wings

Optional:

- ▶ Single-side folding
- ▶ Individual boom tilt
- ▶ Boom slant



The EAGLE boom is available with two different hydraulic set-ups.

Y-version gives an easy folding where left and right side of the boom are folded symmetrically.

Z-version is electro-hydraulic and gives the possibility of individual tilt and single-side folding.

Boom slant is an option on both versions.



The nozzle bodies are located behind and above the bottom of the boom structure, giving maximum protection.

HC 5500 controller

The obvious choice

HC 5500

The HC 5500 is a powerful computer making the spray features easier and safer to use and easily supplies more information when needed. It is the obvious choice where features like IntelliTrack and advanced farming tools are desired. The operator is instantly informed of the operation status and warned if vital parameters like pressure, speed, etc. are incorrect.

It is advanced farming, ready with up to 98 register and connection possibilities to a site-specific application map or a remote sensor. Various optional extras like SprayRover, TankGauge or 12-V printer are available.

The LogicMenu makes it easy to get vital information very quickly; when pressing preset keys, the information appears in the largeformat area of the screen. They double up as short cut keys for the most used functions. Volume rate can be changed on the go as a percentage or as a volume value.

HC 5500 is equipped with the new SprayBox III, allowing connection of spray management systems like SprayRover 570.



Ag Leader InCommand 800

The Ag Leader InCommand terminal is a separate unit that can be connected to the HC 5500 via an interface module as a navigation and automatic section control.


It features an 8.4 "full HD touch screen that is easy to read and easy to use.



Technical specifications

Boom	EAGLE	PRO
Tank, l (net)	2500	2500
Pumps, type – l/min	364-194	364-194
Booms, m	18 / 20 / 21/ 24	12 / 15 / 16 / 18 / 20 / 21
Hydraulic outlets needed (Y models)	1 single + 1 double acting**	1 single + 1 double acting**
Hydraulic outlets needed (Z models)	1 double acting**	1 double acting**
Weight total (empty tank), kg	1.740-1.880	1.880-2.100
Total length*, m A	5.40 / 5.53***	5.40 / 5,53***
Total height*, m B	2.90 (11.2 × 38)	3.61 (11.2 × 38)
Width with boom in transport position*, m C	2.98	2.55
Track width, m	1.50-2.00	1.50-2.00
Length draw to axle, m	3.95	3.95
Ground clearance, m	0.70 (11.2 × 38)	0.70 (11.2 × 38)
RinseTank, l	250	250

* Measurements: EAGLE 18 m, PRO 21 m **Extra outlets needed for Slant on Y version, and for Slope correction *** No steer / steer

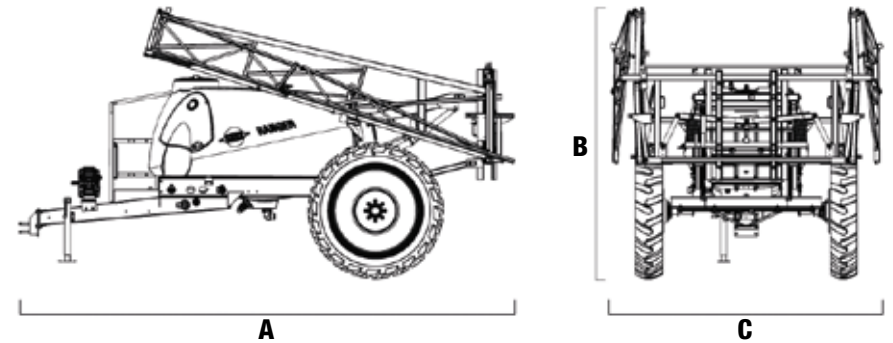

Optionals



Controller HC 5500
Well proven
reliable spray controller



SprayRover 570
GPS controlled
AutoSectionControl



Brakes
Hydraulic brakes,
Parking brake,
Pneumatic brakes 1 or 2 circuits



External Cleaning Kit
Hose reel and spray gun for
external cleaning



CycloneFilter
Unique pressure filter with
high speed cyclone action
for self-cleaning
**Standard on PRO booms*



Nørre Alslev,
Denmark



Leida,
Spain



Savigny,
France



Beaurainville,
France



Davenport,
USA



Adelaide,
Australia

HARDI

The Sprayer

HARDI INTERNATIONAL A/S

is an international group whose basic idea is to satisfy the user's requirements for quality products which ensure efficient, punctual and precise application of crop protection products. Our world-wide distribution and sales network comprise more than 100 countries where we are represented by importers, agents and sales subsidiaries. These are situated in Sweden, Norway, Denmark, the UK, France, Spain, North America, Germany and Australia.

Since 1957 HARDI has committed to the ever-increasing demands for efficient and precise plant protection. HARDI is the trendsetter within application of crop protection products. To achieve this position continued developments and innovation are essential. HARDI is committed to the long term future of plant protection.

Testing procedures

Sprayers leaving HARDI INTERNATIONAL A/S are tested according to the strictest quality standards.

The staff of the assembly line is accredited to match the demands from both NSTS (National Sprayer Testing Scheme), UK and JKI (Julius Kühn Institut), Germany. This ensures that the highest quality sprayers are delivered to farmers.



Superb surface treatment

The high-technology surface treatment contains 13 treatments, including a pre-treatment and powder coat painting of all major components.

Together with the Delta/Magni treatment of nuts, bolts and other items, we supply high corrosion protection of our products.

HARDI reserves the right to change the specifications without notice. Illustrations shown may include optional extras and accessories.



HARDI INTERNATIONAL A/S

Herthadalvej 10 · 4840 Nørre Alslev · Tlf.: +45 43 58 85 00 · Fax: +45 43 58 85 20
E-mail: hardi@hardi-international.com · www.hardi-international.com



#HARDIsprayers

HIA MARKETING 897384 EN 03.2017